



Desktop Paging Microphone

CM-800

The chime desktop microphone is designed for many applications. It allows the user to work with a quality condenser gooseneck microphone with light ring. The robust design, the gooseneck, and the simple operation with a single key are all good features for a user-friendly system.


The chime is a four way chime, before and after the message (every time you push the mic bottom) and has a separate chime volume control. By tuning the volume to '0', the system can work without chime.

The desktop unit has a built in preamp. Together with the volume control of the audio output you can use this unit on any amplifier.

The ideal choice for small 100V systems like supermarkets, restaurants, schools, sport clubs, ...

Delivery includes:

- Desktop microphone
- Power supply
- Windscreen
- Audio cable (jack-jack)

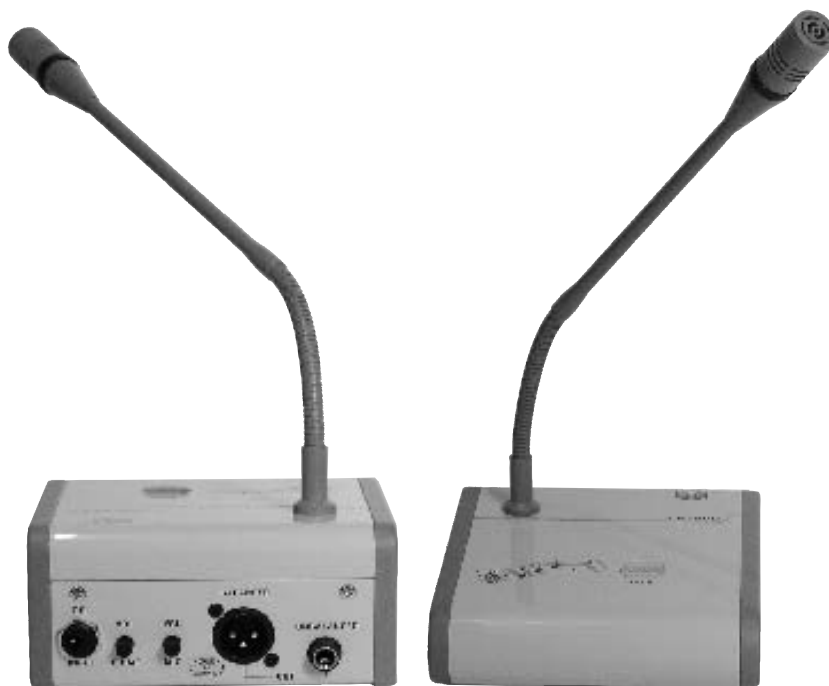

Technical data

Power voltage	Voltage transformer DC15V 400mA
Chime	440, 554, 659, 880HZ four stage musical
Microphone	Condenser microphone cartridge
Unbalanced output	110mV 10mV 6,3 Jack
Balanced output	230mV 10mV XLR 3
Weight	0,8Kg
Dimension (W)x(D)x(H)	132x155x380mm

SENNHEISER BELUX BVBA

Brusselsesteenweg n° 496, bus 1 – 1731 Zellik-Asse
Tel. : 02/466 44 10 Fax : 02/466 49 20
E-mail: info@sennheiser.be

SENNHEISER NEDERLAND BV

Jool Hulstraat 16 – 1327 HA Almere
Tel: +31(0)36 535 84 44 Fax: +31(0)36 535 84 99
E-mail: info@sennheiser.nl